

Ventech VFG 300 Frameless Extract Grille

Ceiling or Side Wall
Mounted

For larger ventilation
requirements.

Plaster board or tiled ceilings
and walls.

Dimensions: 300 x 300 overall
Plaque size: 250 x 250
200mm dia top exit spigot

A minimalist grille showing only a negative detail
300mm square 25mm w x 50mm d. Framework
and fixings are not seen.

Once the unit is plastered in place the flexible
duct is pulled down through the hidden frame
and attached to the central plaque and spigot
using simple and completely invisible screwed
fixing.

The exposed surface of the plaque is level with
the ceiling and can be painted if required at the
same time as the ceiling.

Everything is possible with Ventech as your Partner


Designed and manufactured in New Zealand

T 0800 VENTECH
(0800 8368324)

M 027 279 6399

E enquiries@ventech.co.nz
www.ventech.co.nz

Ventech VFG 300 Frameless Extract Grille – dimensions & mounting details

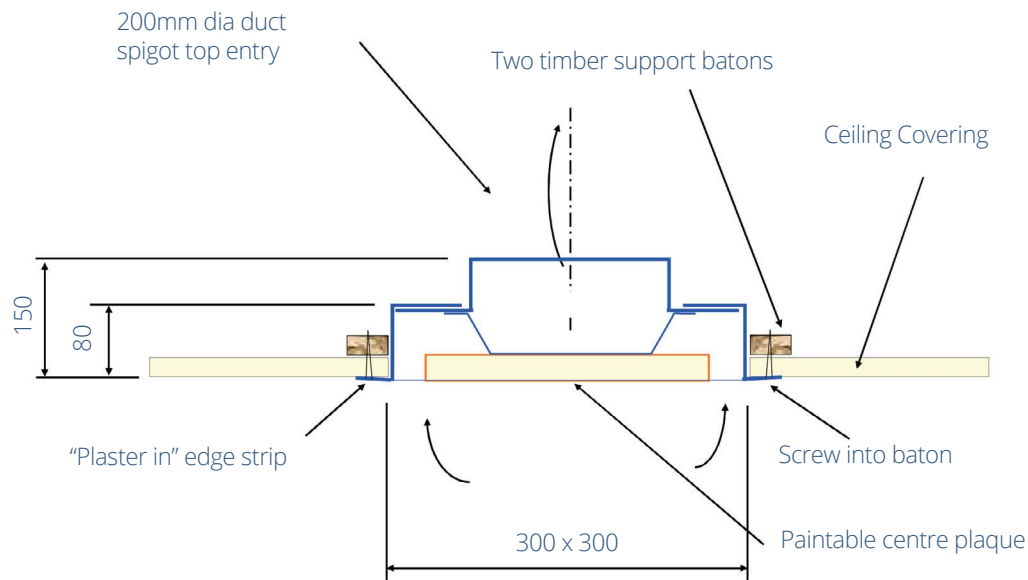

SPECIFICATION

- Ventech VFG 300 Frameless Grille with 200mm spigot top entry.
- Frame and plaque powder coated, may be painted to match the ceiling
- Suitable fans, ductwork and exterior grilles also available.
- At a typical flow rate of 85 litres per second, pressure drop is 28 pa.

FITTING

- Cut 300 sq hole in ceiling. Fit grille box from the underside and fix with 4 gib screws through the plastering edge.
- Plaster the edges flush with the ceiling.
- After painting the ceiling and the box, pull the duct down through the hole and fix to the spigot and plate.
- Fit the spigot plate with the screws provided.

the Sound of Silence

Designed and manufactured in New Zealand

T 0800 VENTECH
(0800 8368324)

M 027 279 6399

E enquiries@ventech.co.nz
www.ventech.co.nz

